

# Pola Landscape Light

# AMECO

Installation Manual

v1.0-20191220






IP65



Ta 45°C  
113°F

120V-277V

- Dimension : 154 x 600 x 141.5mm
- Weight : 6kg / 13.2lbs

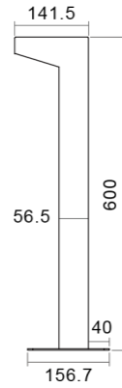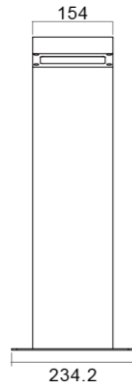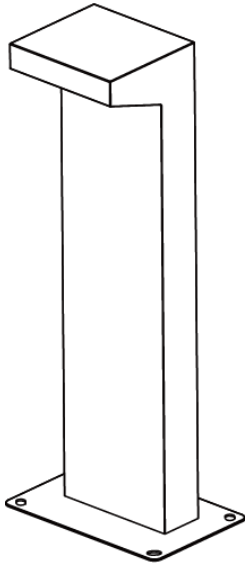


Unit : mm

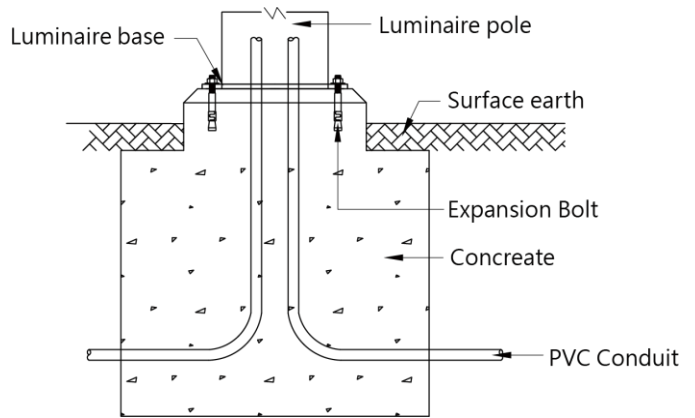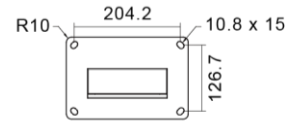

## Installation


### Step.1

Drill holes (4x) for Expansion Bolt slip in.

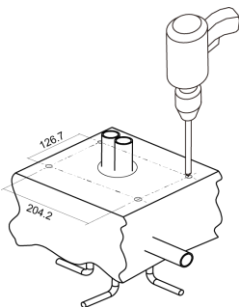


### Step.2

Connect L, N, GND 3 wires

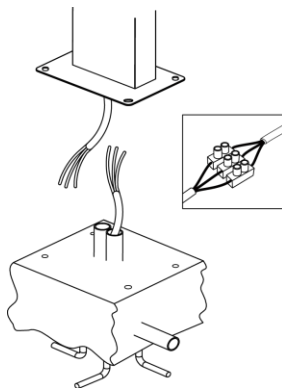


### Step.3

M8 Expansion Bolt 4x

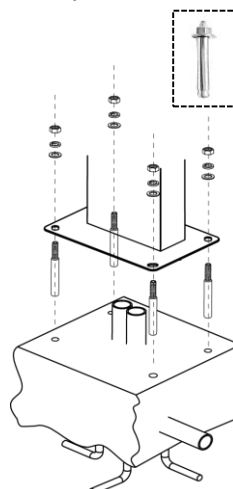

### Step.4

Fasten nuts (4x)

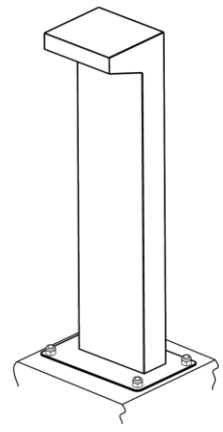

## Note:

1. Please disconnect the electricity supply when install or conduct maintenance to the luminaires.
2. Luminaires should be installed by a qualified electrician and wired in accordance with national regulations.
3. Luminaires should be replaced immediately if any cracks or damage found.
4. The light source and power supply in this luminaire shall only be replaced by the manufacturer.
5. The operating ambient temperature of this luminaire should be between  $-20^{\circ} \sim +45^{\circ}$ .
6. Used terminal block for connection to external power supply cord shall confirm to EN 60998-2-1 or EN 60998-2-2 or other approved terminal with safety norm. Rated voltage: min. AC120-277V, Rated connecting capacity: min. 1.0mm. Necessary preparation of the ends of conductors: The wire ends of power cord need to be treated as clipping to avoid the separation of the wire ends.
7. If the external cable of this luminaire is damaged, it shall be exclusively replaced by the manufacturer, approved service agent or a similar qualified personnel to avoid a hazard.
8. Please add Surge Protection units ( $> 10KV$ ) to avoid accident damage of lightening or unexpected high voltage shock under outdoor environments.
9. It is highly recommended to install residual circuit breaker for protection of accidental current leakage which may cause electrical shock to live body.



Do not stare at the light source when light being turn on.



[www.deltaww.com](http://www.deltaww.com)

[LS.Sales@deltaww.com](mailto:LS.Sales@deltaww.com)

TEL : +886 2 8797 2088 FAX : +886 2 6606 3308

No.186, Ruiguang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

© Delta Electronics, Inc. All rights reserved.