
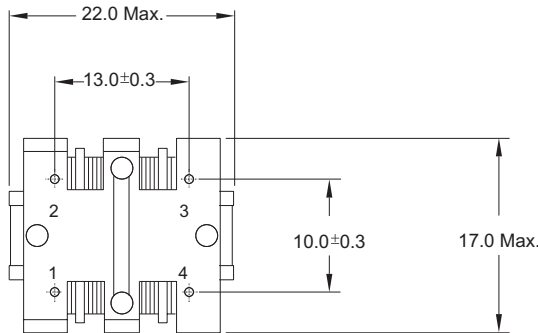

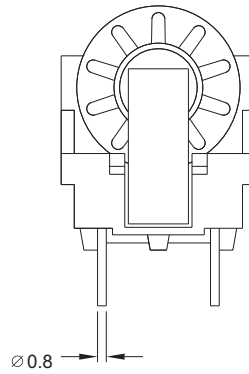


Common Chokes


EMI Common-Mode Suppression Inductors

HFO20V Type

Mechanical Dimension: Unit: mm

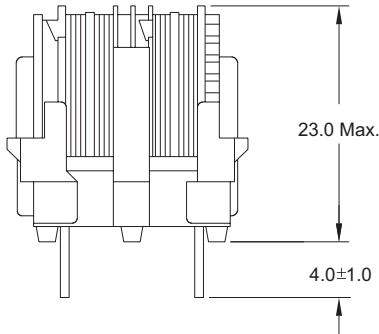

Schematic :

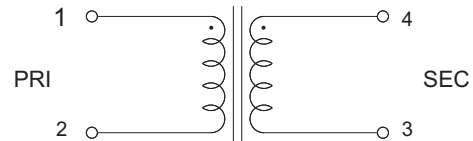

Electrical Characteristics:

■ AT 25°C, 40KHz/1V Tested:

| PART NO. | INDUCTANCE (mH) MIN | DCR (mΩ) MAX | RATED CURRENT (Aac) | TEMPERATURE RISE (°C) MAX |
|----------|---------------------|--------------|---------------------|---------------------------|
| HFO20V01 | 40.0 | 2870 | 0.30 | 45 |
| HFO20V02 | 27.0 | 1890 | 0.40 | 45 |
| HFO20V03 | 20.0 | 1400 | 0.50 | 45 |
| HFO20V04 | 16.5 | 1110 | 0.55 | 45 |
| HFO20V05 | 13.0 | 990 | 0.60 | 45 |
| HFO20V06 | 11.0 | 745 | 0.70 | 45 |
| HFO20V07 | 9.0 | 580 | 0.80 | 45 |
| HFO20V08 | 6.2 | 410 | 0.90 | 45 |
| HFO20V09 | 5.0 | 330 | 1.10 | 45 |
| HFO20V10 | 3.9 | 255 | 1.30 | 45 |
| HFO20V11 | 2.4 | 155 | 1.70 | 45 |
| HFO20V12 | 1.6 | 105 | 2.00 | 45 |

* WITHSTANDING VOLTAGE BETWEEN L1 & L2 1.5KV 1 MINUTE
* GOOD DIFFERENCE IN WINDING L1 & L2 INDUCTANCE



DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.

TEL: 886-3-3591968; FAX: 886-3-3591991

<http://www.deltaww.com>