

1 Electronic Design Spec

1.1. INPUT VOLTAGE

Rated input voltage: 100-240VAC

Input voltage range: 90-264VAC

Rated input frequency: 50-60Hz

Input frequency range: 47-63Hz


1.2. CONSTANT VOLTAGE

The fully charge voltage is $42V \pm 0.2V$.

1.3. CONSTANT CURRENT

The constant current is $6A \pm 0.2A$.

1.4. Charging curve

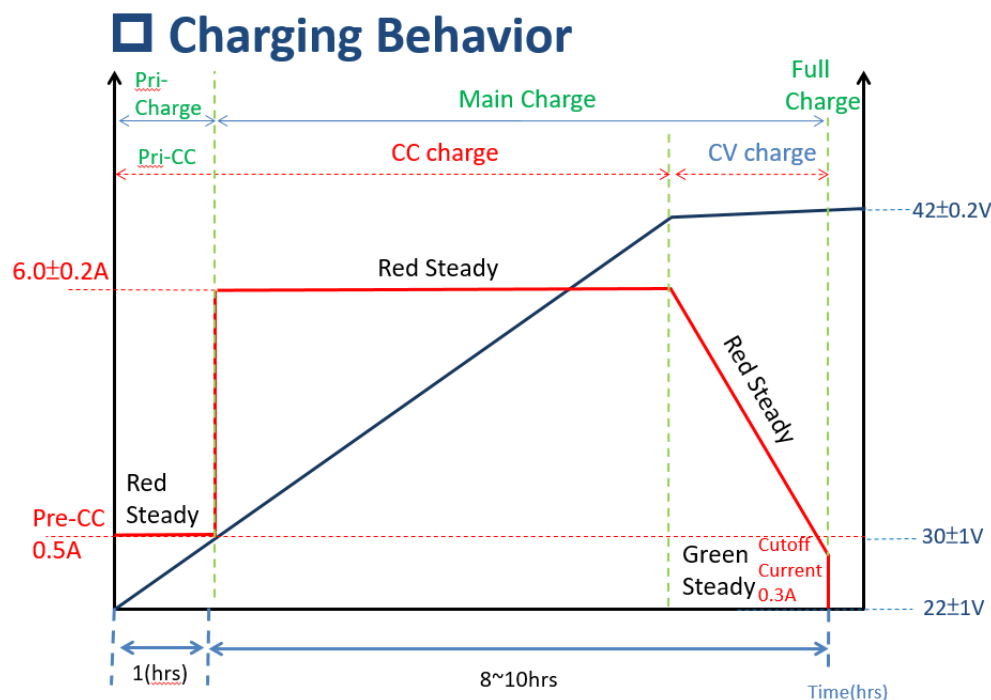

台達電子工業股份有限公司
DELTA ELECTRONICS, INC.

DESCRIPTION :
電氣規格 (Electrical Specification)

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

MODEL NO. :

ADP-252BR

Date

Drawn

Design (EE)

Design (ME)

DOCUMENT NAME. :

REV.

2022/02/17

Dean

Mingche

ES-252BR

S00

1.5. STATUS INDICATION (LED)

A visual indicator (LED for instance) must inform of the following status:

When charger is stand-by mode: Green steady

When charger is pre-charge mode: Red steady

When charger is charge mode: Red steady

When charger is fully charge mode: Green steady

When charger is over timing mode: Green 1sec/ Red 1sec blinking

When charger is protect mode: LED off.

1.6. Harmonic

Class D

1.7. ALTITUDE

3000m

1.8. Inrush current

No damage.

1.9. Acoustic Noise

At 1 meter the noise must be < 35dB

2. CERTIFICATIONS (Safety / EMC)

The charger has to comply with regulation, standard and laws and pass every Safety and EMC certifications.

Certification: The charger has to be UL62368-1, IEC60335-1 and IEC60335-2-29.

2.1. Lightning surge immunity:


Follow the norm of IEC-61000-4-5 requirements

Line to Line: 1kV 50us 5 time performance Criterion B

2.2. Electric Fast transients (EFT):

Follow the norm of IEC-61000-4-4 requirements

IEC61000-4-4 level 3 (2kV), performance Criterion B

 台達電子工業股份有限公司 DELTA ELECTRONICS, INC.				DESCRIPTION : 電氣規格 (Electrical Specification)	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.				MODEL NO. : ADP-252BR	
Date	Drawn	Design (EE)	Design (ME)	DOCUMENT NAME. :	REV.
2022/02/17		Dean	Mingche	ES-252BR	S00

File Name:

SHEET 3 OF 6

2.3. Electrostatic Discharge (ESD):

Follow the norm of IEC-61000-4-2 requirements

- (1). +/-15KV air discharge performance Criterion B
- (2). +/-8KV contact discharge performance Criterion B

2.4. Voltage Dips/Short Interruption:

Follow the norm of EN61000-4-11 requirements

- (1). Voltage Dips 30% reduction 10ms, performance Criterion B
- (2). Voltage Dips 60% reduction 100ms, performance Criterion C
- (3). Voltage Dips 95% reduction 5000ms, performance Criterion C

2.5. Dielectric Withstand Voltage (HI-POT)

Primary to Secondary: 3000Vac, 10mAmax for 1 minute

2.6. Leakage current

It shall be less than 300uA at 264Vac/60Hz

2.7. Insulation Resistance (IR)

PRIMARY(L,N) to SECONDARY use 500Vdc test ; Insulation resistance limit: >50M ohm

2.8. Electromagnetic interference (EMI)

CISPR 14 Class B


3. PROTECTION

3.1. OVER VOLTAGE PROTECTION

The charger shall auto-recovery and no damage occurs if the output is over voltage.

3.2. OUTPUT CURRENT PROTECTION

The charger shall auto-recovery and no damage occurs if the output is over current.

 台達電子工業股份有限公司 DELTA ELECTRONICS, INC.				DESCRIPTION : 電氣規格 (Electrical Specification)	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.				MODEL NO. : ADP-252BR	
Date	Drawn	Design (EE)	Design (ME)	DOCUMENT NAME. :	REV.
2022/02/17		Dean	Mingche	ES-252BR	S00

3.3. OUTPUT SHORT CIRCUIT PROTECTION

The charger shall auto-recovery and no damage occurs. If the short circuit is applied to the output.

3.4. OVER TEMPERATURE PROTECTION

The charger shall auto-recovery and no damage occurs if the component temperature is higher than normal work.

3.5. TIMING PROTECTION

When pre-charge mode charging time over 1hour \pm 20min, the charger stops charging and Green 1sec/ Red 1sec blinking.

When charge mode charging time over 9hours \pm 1hour, the charger stops charging and Green 1sec/ Red 1sec blinking.

3.6. BATTERY OVER TEMPERATURE PROTECTION

When $2.22\text{kohm} \leq \text{NTC} \leq 37.86\text{kohm}$ ($-7^{\circ}\text{C} \leq \text{battery NTC temperature} \leq 70^{\circ}\text{C}$), The charger is normal charging.

When $2.22\text{kohm} \leq \text{NTC} \leq 2.7\text{kohm}$ ($63^{\circ}\text{C} \leq \text{battery NTC temperature} \leq 70^{\circ}\text{C}$), The charge current reduced to $0.5\pm 0.2\text{A}$.

4. TEMPERATURE

4.1. Operation

4.1.1 Temperature Operating


The charger shall be capable of operating at full load with an ambient temperature range of 0°C to $+40^{\circ}\text{C}$.

4.1.2 Temperature Storage

The charger shall be capable of withstanding ambient temperature from -20°C to $+70^{\circ}\text{C}$.

4.1.3 Humidity Operating

The charger shall be capable of operation in relative humidity of 10% to 90%.

				DESCRIPTION : 電氣規格 (Electrical Specification)	
台達電子工業股份有限公司 DELTA ELECTRONICS, INC.				MODEL NO. : ADP-252BR	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.				DOCUMENT NAME. :	REV.
Date	Drawn	Design (EE)	Design (ME)	ES-252BR	S00
2022/02/17		Dean	Mingche		


4.1.4 Humidity Storage

The charger shall be capable of withstanding ambient relative humidity of 5% to 95%.

5. Reliability requirements

MTBF (standard, environmental temperature, load requirement) ≥ 100 Khour

Testing condition : full load/ 25°C .

				台達電子工業股份有限公司 DELTA ELECTRONICS, INC.		DESCRIPTION : 電氣規格 (Electrical Specification)	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.				MODEL NO. : ADP-252BR			
Date	Drawn	Design (EE)	Design (ME)	DOCUMENT NAME. : ES-252BR		REV.	
2022/02/17		Dean	Mingche			S00	