




DELTA P/N : TLM117513F Series

Mechanical Dimensions & Schematic

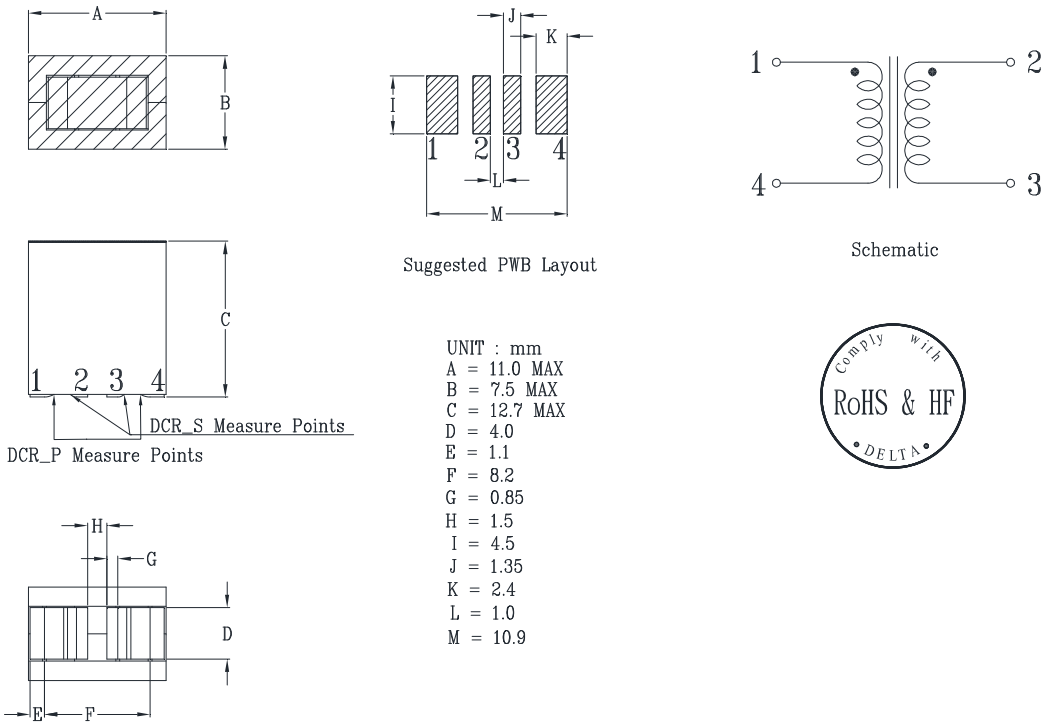

Electrical Characteristics @ 25°C, 100kHz, 1V

Delta P/N	L (nH) ± 15%	Li (nH) MIN	DCR_P (mΩ) ± 10%	DCR_S (mΩ) ± 10%	Isat ¹ (A)			Ir_P ² (A)	Ir_S ² (A)
					25°C	100°C	125°C		
TLM117513F-900	90	63	0.105	0.27	145	123	116	80	50
TLM117513F-121	120	84			106	90	85		
TLM117513F-131	130	91			98	83	78		
TLM117513F-151	150	105			82	70	66		

1. Isat is the DC current which causes the inductance drop to Li.
2. Ir is the DC current which causes the surface temperature of the part increase approximately 40 °C.
3. Operating temperature: -40°C to 125°C (Self-temperature rise included).