



Digitized Automation for a Changing World

Delta Smart Screwdriving System



Little Things Make a Big Difference

Along with the technological innovation and booming development of electronics such as automotive electronics, quality demands in the industry are becoming higher than ever. Therefore, high precision, zero-defect management, and product traceability requirements are rising in electronics manufacturing. To reach the zero-defect goal, any detail, even the tightening results for every small screw is critical for product quality management.

Delta has leveraged its accumulated technological capabilities in motion control to integrate servo systems, reducers, torque sensors, and industrial robots to introduce a screw-driving solution featuring real-time status checks and tightening problem elimination. With precise output torque and angle control, Delta's screw-driving solution can prevent quality issues caused by screw driving, such as stripped and underdriven screws. Users can also connect the solution to an MES system to control parameters by host controllers that prevent human errors and save the tightening information for traceability and torque management.

Facing the fast-changing high-tech manufacturing industry, Delta has started with a small screw to help customers enhance product and service quality, while leveraging zero-defect goals and the vision of "Digitization for a Changing World".



Table of Contents

Delta Smart Screwdriving System 3

- Product Features
- Functions and User Interface
- System Architecture

Specifications 8

Dimensions 9

Model Name Explanation 10

Ordering Information 10

Delta Smart Screwdriving System

Integrates the key technologies of servo motors, torque detection, and software control with Delta's manufacturing experience. The screwdriving solution meets precision and quality requirements for various scenarios

Smart Screwdriving Controller

- 1 high-performance controller supports 2 screwdrivers*¹ (specific feature for dual-tool controller ASD-SD3041B-2)
- 10.1-inch display for easier examination and operation
- Large memory capacity stores up to 200,000 results and curve graphs
- Offers various tightening strategies for different scenarios




Smart Screwdriver

- Torque sensor signals are directly fed to the full closed-loop control, high-precision of $\pm 3\%$
- Low cogging torque of the DC servo motor
- Light indicator shows tightening status
- Front LED work light eliminates shading during operation
- Easy mounting on robots or machines with a flange


Delta Smart Screwdriving System

Product Features


Detects / Eliminates common screwdriving problems

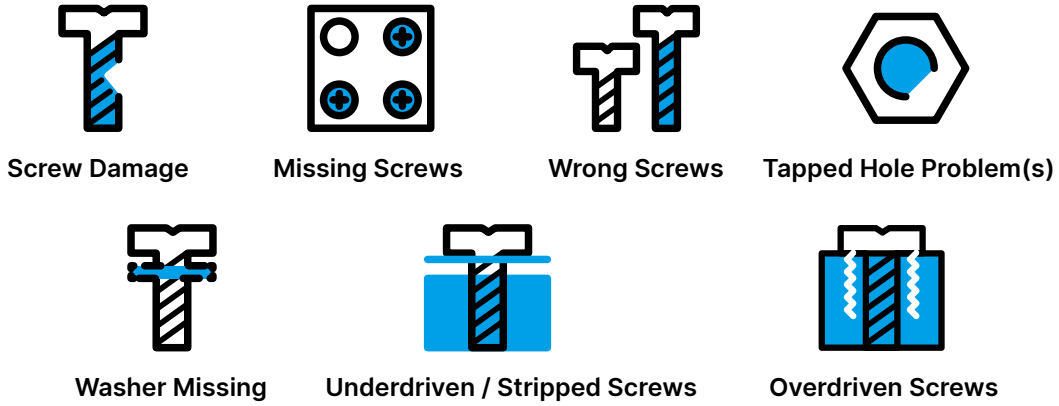

Monitors torques and angles to ensure a correct tightening process

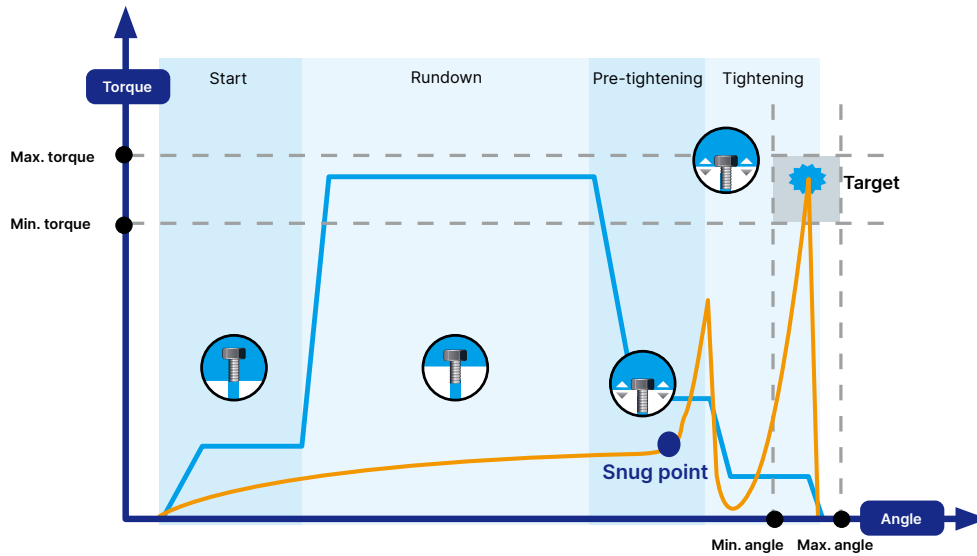

3 control modes for various screwdriving scenarios

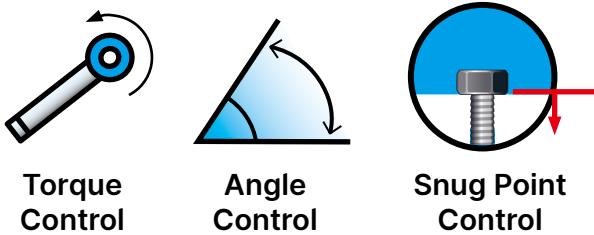

Large memory capacity to store operation results




- 500 sets of parameters
- 500 sets of tightening sequences
- Up to 200,000 entries of report (incl. torques, angles, curve graphs, and more)

Delta Smart Screwdriving System

Product Features



Production data can be updated to MES for real-time management

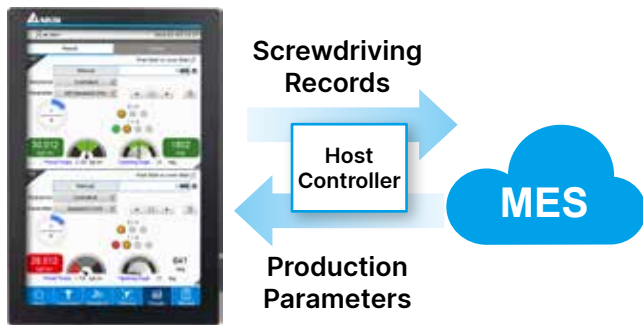

Applies corresponding parameters with a scanner to reduce human errors



One controller drives two screwdrivers for flexible production line implementation (specific feature for dual-tool controller ASD-SD3041B-2)

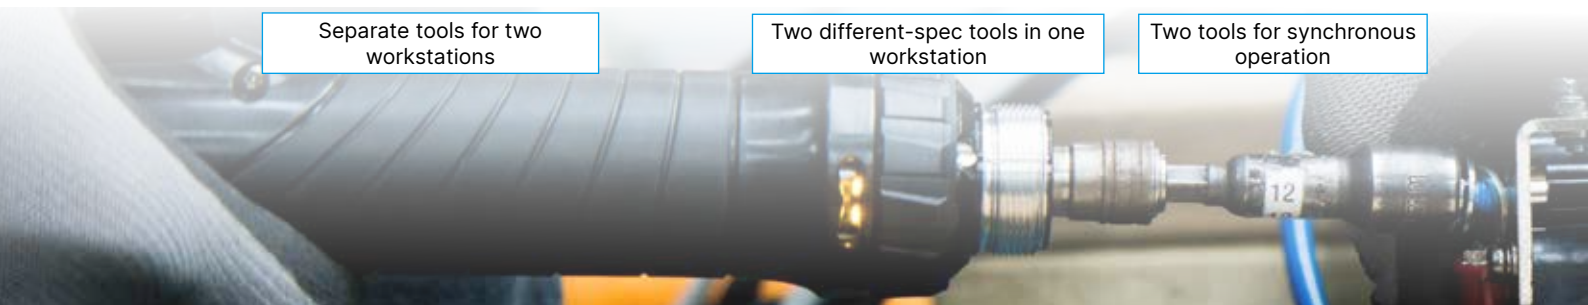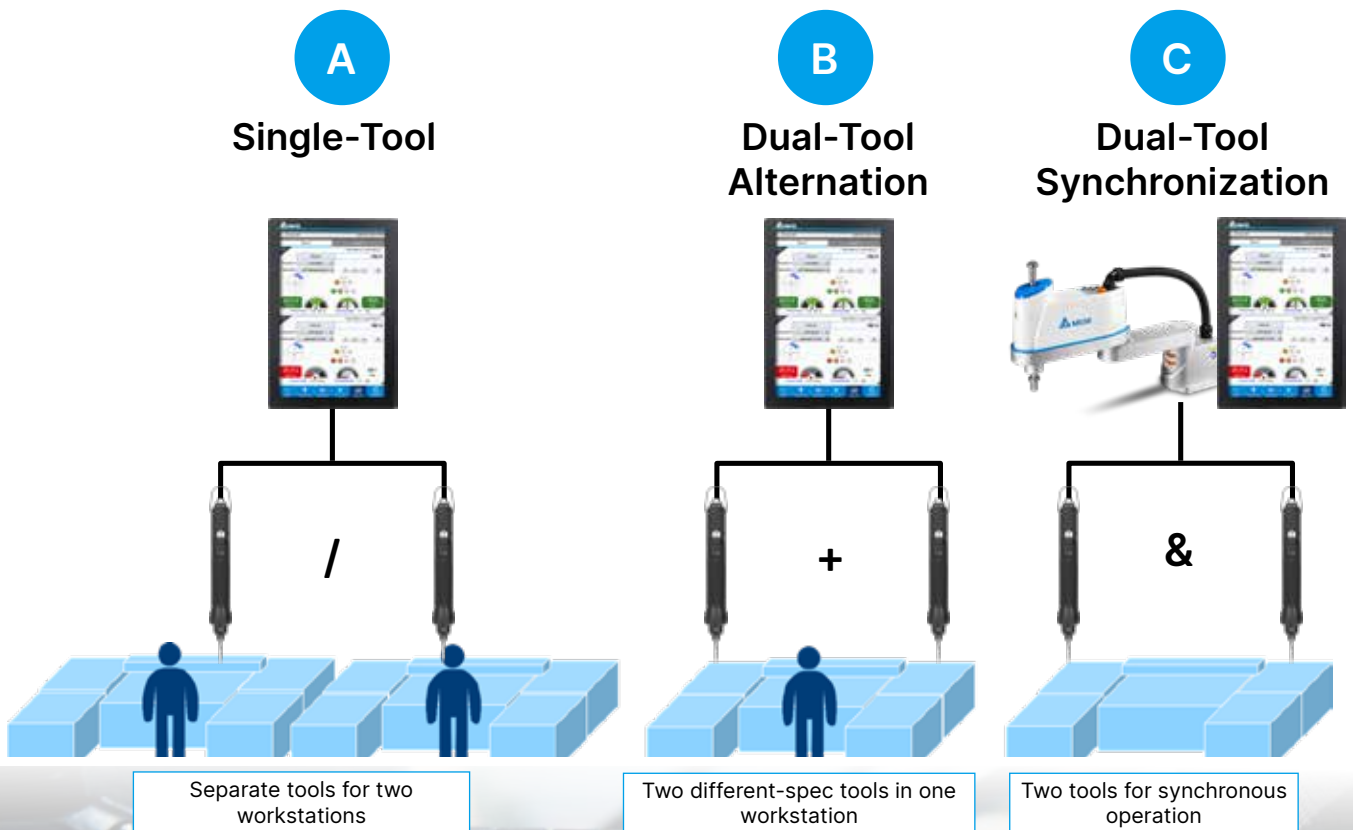

Functions and User Interface

Dual-tool operation with one controller

- A dual-tool controller (ASD-SD3041B-2) controls two smart screwdrivers to save space and costs
- Provides single-tool, dual-tool alternation, and dual-tool synchronization modes for flexible production line implementation

Sets and monitors key quality parameters

- Monitors angle, torque, rotation speed, time limit, quantity of screws, loosening count, and tightening sequences to ensure quality

Detects quality issues

- Detects underdriven / stripped / missing screws, torque/angle errors and others

Capable of host controller connection

- Alarm notifications
- Changes parameters based on commands from the host controller
- Stores and uploads screwdriving records



Intuitive parameter configuration

- Simple display design and large touch screen for easy operation



Various tightening strategies for figuring out the ideal solution

- Standard Strategy: Separate tightening process into four stages to meet most scenarios
- Pre-Position Strategy: Fix screw position in the workpiece without clamping
- Enhanced Strategy: Tighten the screws or further tighten the screws with higher torque
- Self-Defined Strategy: Arrange the tightening process as needed

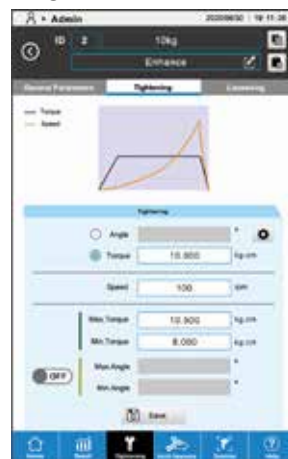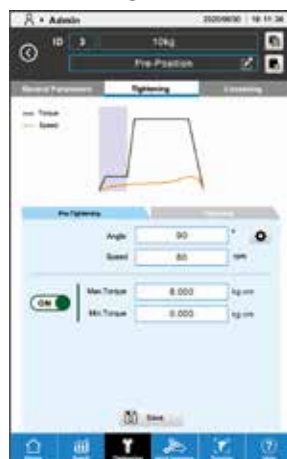

Delta Smart Screwdriving System

Functions and User Interface


Clear display

- Hierarchic display for users to quickly know the status, torque, and quality information as well as to check the model and tightening information




Complete results and reports

- Records complete process with torques, angles, and tightening strategies for each screwdriving for traceability and analysis

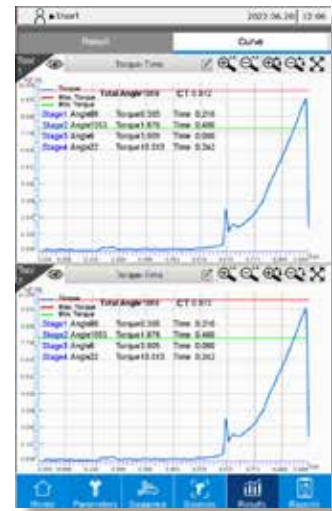

System Architecture

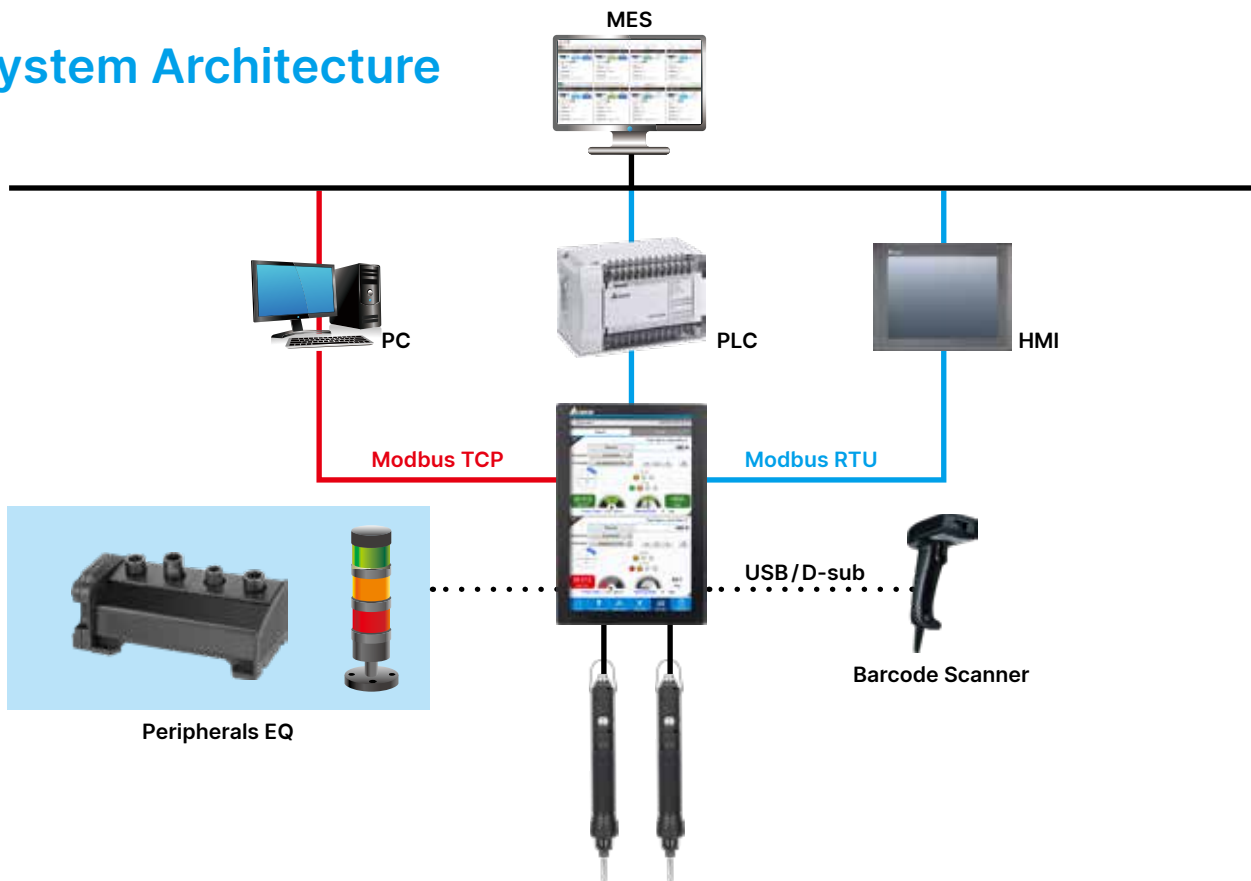

Specifications

Smart Screwdriver


Model	ECM-SD3-F12S0 ECM-SD3-F12S1	ECM-SD3-F30S0 ECM-SD3-F30S1	ECM-SD3-F50S0 ECM-SD3-F50S1	ECM-SD3-F75S0 ECM-SD3-F75S1
Input Voltage	38 V _{DC}			
Torque Range (kgf-cm)	2.4 ~ 12	6 ~ 30	10 ~ 50	15 ~ 75
Precision	±3%			
Max. Rotation Speed	2000 rpm	1100 rpm	700 rpm	500 rpm
Tool Length	268.5 mm			
Weight	560 g			
Handheld Diameter	34 mm			
Bit Specification	6.35 mm hex head for the model name that ends with 0 5 mm hex head for the model name that ends with 1			
Operating Temperature	0°C (32°F) to 40°C (104°F)			
Storage Temperature	0°C (32°F) to 60°C (140°F)			
Humidity	0 ~ 90 % RH (non-condensing)			
IP Rating	IP40			

Smart Screwdriving Controller


Controller	ASD-SD3021B-1 (Single-Tool Controller)	ASD-SD3041B-2 (Dual-Tool Controller)
Input Voltage	100 ~ 240 V _{AC}	
DC Bus Voltage	38 V _{DC}	
Rated Output Current	3.7 Arms	
Max. Instantaneous Output Current	15 Arms	
Rated Power Output	100 W / one tool	200 W / two tools
Screen Size	10.1" (Touchscreen)	
Dimensions	200 x 252 x 121 mm	

Dimensions




Smart Screwdriver

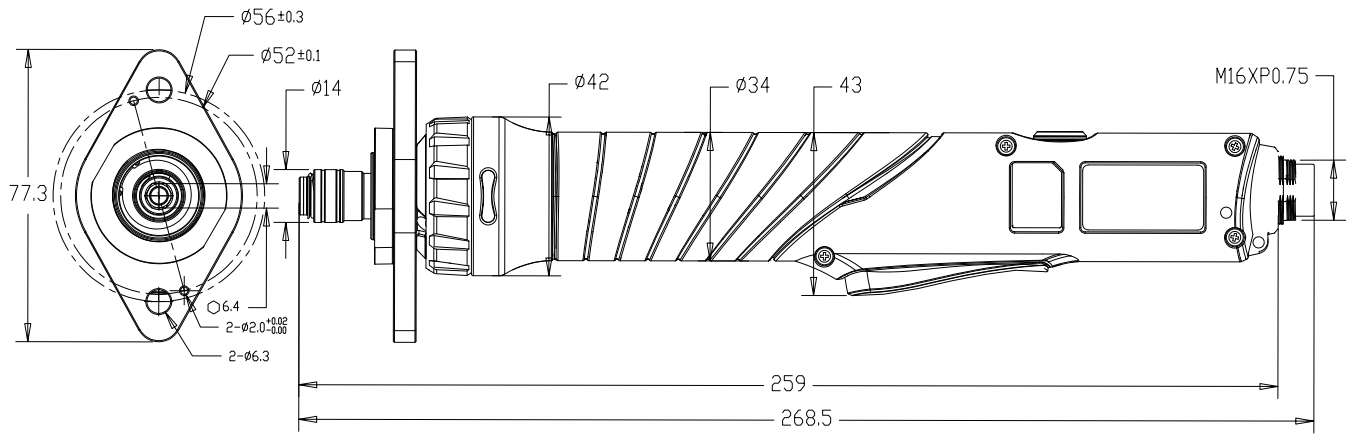

Smart Screwdriving Controller

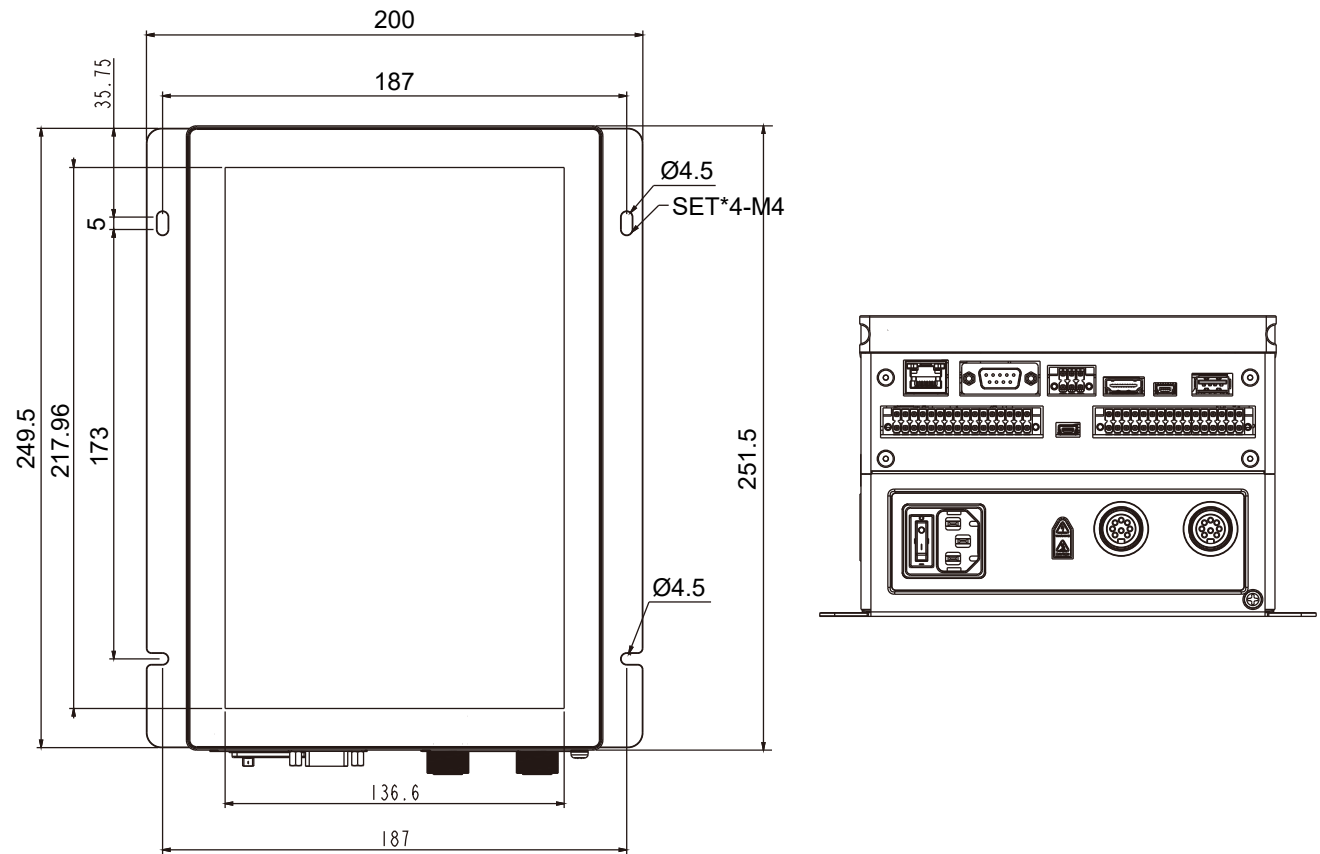

Model Name Explanation

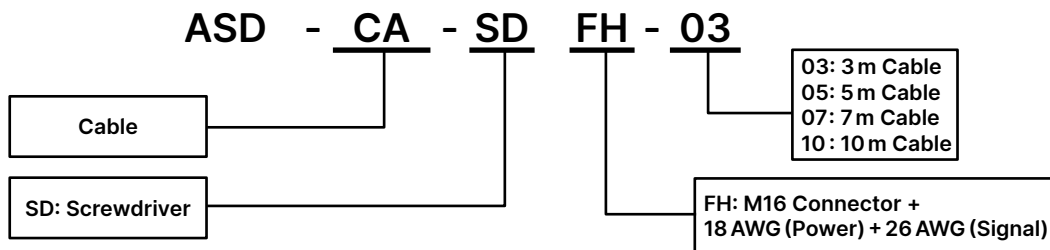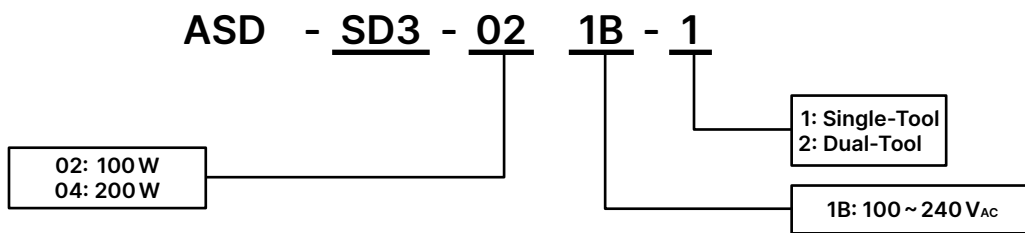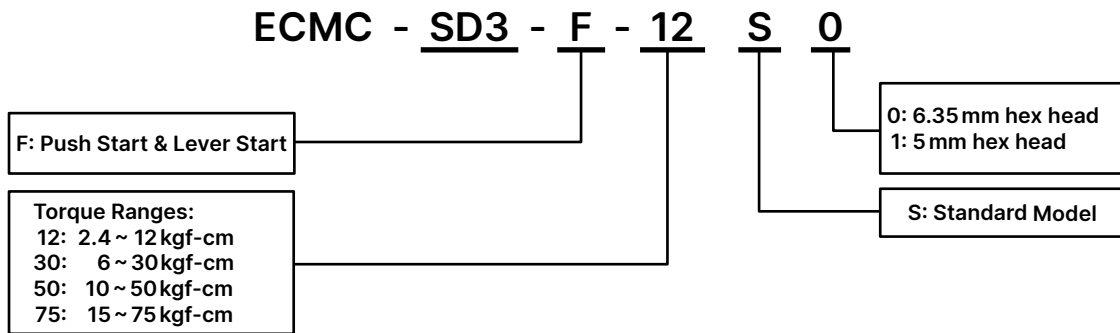

Ordering Information

Smart Screwdriving System Models	Specifications
ECM - SD3 - F12S0	2.4 ~ 12 kgf-cm, 6.35 mm Hex head
ECM - SD3 - F30S0	6 ~ 30 kgf-cm, 6.35 mm Hex head
ECM - SD3 - F50S0	10 ~ 50 kgf-cm, 6.35 mm Hex head
ECM - SD3 - F75S0	15 ~ 75 kgf-cm, 6.35 mm Hex head
ECM - SD3 - F12S1	2.4 ~ 12 kgf-cm, 5 mm Hex head
ECM - SD3 - F30S1	6 ~ 30 kgf-cm, 5 mm Hex head
ECM - SD3 - F50S1	10 ~ 50 kgf-cm, 5 mm Hex head
ECM - SD3 - F75S1	15 ~ 75 kgf-cm, 5 mm Hex head
ASD - SD3021B-1	100 ~ 240 V _{AC} , 100 W, Single-Tool
ASD - SD3041B-2	100 ~ 240 V _{AC} , 200 W, Dual-Tool
ECM - SD3 - ACSSR	Flange module for fixing the smart screwdriver to a machine
ACS3 - CASDFH03	Cable between screwdriver and controller - 3 m
ACS3 - CASDFH05	Cable between screwdriver and controller - 5 m
ACS3 - CASDFH07	Cable between screwdriver and controller - 7 m
ACS3 - CASDFH10	Cable between screwdriver and controller - 10 m
ACS3 - CAPW311A	US-standard power cable with 3-pin plug
ACS3 - CAPW311C	CN-standard power cable with 3-pin plug



Smarter. Greener. Together.

Industrial Automation Headquarters

Taiwan: Delta Electronics, Inc.

Taoyuan Technology Center
No.18, Xinglong Rd., Taoyuan District,
Taoyuan City 330477, Taiwan
TEL: +886-3-362-6301 / FAX: +886-3-371-6301

Asia

China: Delta Electronics (Shanghai) Co., Ltd.

No.182 Minyu Rd., Pudong Shanghai, P.R.C.
Post code : 201209
TEL: +86-21-6872-3988 / FAX: +86-21-6872-3996
Customer Service: 400-820-9595

Japan: Delta Electronics (Japan), Inc.

Industrial Automation Sales Department
2-1-14 Shibadaimon, Minato-ku
Tokyo, Japan 105-0012
TEL: +81-3-5733-1155 / FAX: +81-3-5733-1255

Korea: Delta Electronics (Korea), Inc.

1511, 219, Gasan Digital 1-Ro., Geumcheon-gu,
Seoul, 08501 South Korea
TEL: +82-2-515-5305 / FAX: +82-2-515-5302

Singapore: Delta Energy Systems (Singapore) Pte Ltd.

4 Kaki Bukit Avenue 1, #05-04, Singapore 417939
TEL: +65-6747-5155 / FAX: +65-6744-9228

India: Delta Electronics (India) Pvt. Ltd.

Plot No.43, Sector 35, HSIIDC Gurgaon,
PIN 122001, Haryana, India
TEL: +91-124-4874900 / FAX: +91-124-4874945

Thailand: Delta Electronics (Thailand) PCL.

909 Soi 9, Moo 4, Bangpoo Industrial Estate (E.P.Z),
Pattana 1 Rd., T.Phraksa, A.Muang,
Samutprakarn 10280, Thailand
TEL: +66-2709-2800 / FAX: +66-2709-2827

Australia: Delta Electronics (Australia) Pty Ltd.

Unit 2, Building A, 18-24 Ricketts Road,
Mount Waverley, Victoria 3149 Australia
Mail: IA.au@deltaww.com
TEL: +61-1300-335-823 / +61-3-9543-3720

Americas

USA: Delta Electronics (Americas) Ltd.

5101 Davis Drive, Research Triangle Park, NC 27709, U.S.A.
TEL: +1-919-767-3813 / FAX: +1-919-767-3969

Brazil: Delta Electronics Brazil Ltd.

Estrada Velha Rio-São Paulo, 5300 Eugênio de
Melo - São José dos Campos CEP: 12247-004 - SP - Brazil
TEL: +55-12-3932-2300 / FAX: +55-12-3932-237

Mexico: Delta Electronics International Mexico S.A. de C.V.

Gustavo Baz No. 309 Edificio E PB 103
Colonia La Loma, CP 54060
Tlalnepantla, Estado de México
TEL: +52-55-3603-9200

EMEA

EMEA Headquarters: Delta Electronics (Netherlands) B.V.

Sales: Sales.IA.EMEA@deltaww.com
Marketing: Marketing.IA.EMEA@deltaww.com
Technical Support: iatechnicalsupport@deltaww.com
Customer Support: Customer-Support@deltaww.com
Service: Service.IA.emea@deltaww.com
TEL: +31(0)40 800 3900

BENELUX: Delta Electronics (Netherlands) B.V.

Automotive Campus 260, 5708 JZ Helmond, The Netherlands
Mail: Sales.IA.Benelux@deltaww.com
TEL: +31(0)40 800 3900

DACH: Delta Electronics (Netherlands) B.V.

Coesterweg 45, D-59494 Soest, Germany
Mail: Sales.IA.DACH@deltaww.com
TEL: +49(0)2921 987 0

France: Delta Electronics (France) S.A.

ZI du bois Challand 2, 15 rue des Pyrénées,
Lisses, 91090 Evry Cedex, France
Mail: Sales.IA.FR@deltaww.com
TEL: +33(0)1 69 77 82 60

Iberia: Delta Electronics Solutions (Spain) S.L.U

Ctra. De Villaverde a Vallecas, 265 1º Dcha Ed.
Hormigueras – P.I. de Vallecas 28031 Madrid
TEL: +34(0)91 223 74 20
Carrer Llacuna 166, 08018 Barcelona, Spain
Mail: Sales.IA.Iberia@deltaww.com

Italy: Delta Electronics (Italy) S.r.l.

Via Meda 2-22060 Novedrate(CO)
Piazza Grazioli 18 00186 Roma Italy
Mail: Sales.IA.Italy@deltaww.com
TEL: +39 039 8900365

Russia: Delta Energy System LLC

Vereyskaya Plaza II, office 112 Vereyskaya str.
17 121357 Moscow Russia
Mail: Sales.IA.RU@deltaww.com
TEL: +7 495 644 3240

Turkey: Delta Greentech Elektronik San. Ltd. Sti. (Turkey)

Şerifali Mah. Hendem Cad. Kule Sok. No:16-A
34775 Ümraniye – İstanbul
Mail: Sales.IA.Turkey@deltaww.com
TEL: + 90 216 499 9910

MEA: Eltek Dubai (Eltek MEA DMCC)

OFFICE 2504, 25th Floor, Saba Tower 1,
Jumeirah Lakes Towers, Dubai, UAE
Mail: Sales.IA.MEA@deltaww.com
TEL: +971(0)4 2690148

*We reserve the right to change the information in this catalogue without prior notice.