



Xtra Slim Laser Video Wall



60" Full HD Laser Lit Video Wall

- Rich picture quality with Full HD Resolution for superb image quality
- Ultra High Brightness to give the most vivid colors
- High lumens efficiency for reducing operating costs
- Browser/Server based architecture for quick monitoring
- Slimmest Laser Cube saves real state
- **With Red Enhancement**



60" Full HD Laser Lit Video Wall

Delta's Laser Video wall is a rear projection, Laser based Full HD Video wall that offers environment friendly Laser illumination, ultra high brightness and true cube redundancy. Industry's first ultra-bright Laser based DLP® video wall improves energy savings of up to 33%.

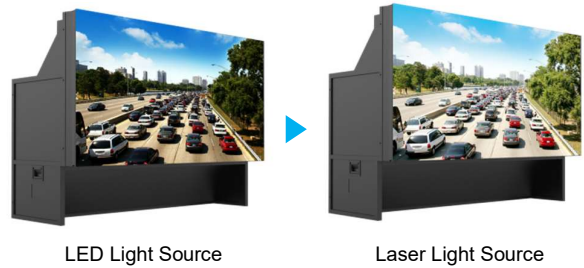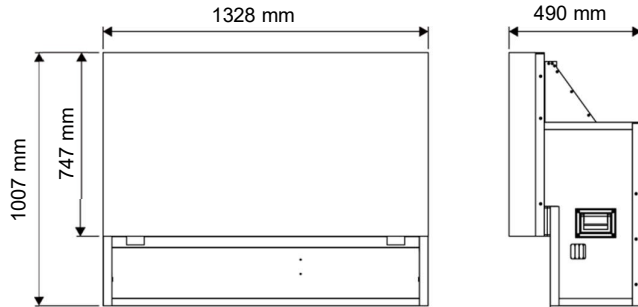

Specifications

Model		DVS-608RS AN / DVS-608FS AN				
Description		Laser Light Source Full HD Cube				
Individual Cube Size		60" Diagonal				
Image Size		1328 x 747 mm				
Display Technology		DLP, single chip				
Native Resolution		1920 x 1080 pixels				
Aspect Ratio		16:9				
Screen to Screen Gap		Rear Access : 0.2mm, Front Access : 1.0 mm				
Light Source		Laser				
Brightness		Typ. 2400 lumens*1				
Brightness Uniformity		Up to 98%*2				
Contrast Ratio		Typ. 1800:1				
Colors		16.7 million				
Red Ratio with White		12%*3				
Color Temperature Range		3200K to 9300K, Custom				
Standard Inputs		1x Digital DVI-I, 2x Digital HDMI, 1x Analog D-sub 15pin, 1x Display Port				
HDMI input support max resolution		3840x2160				
DP input support max resolution		3840x2160				
Standard Outputs*4		2x Digital HDMI				
HDMI output support max resolution		3840x2160				
Control Options		RS-232 / RS 422, IP, IR				
Screen Brightness	Screen Type	Bright mode	Normal mode	ECO mode	Screen Viewing Angle (1/2 Gain)	
	CSI	800 cd/m ²	600 cd/m ²	400 cd/m ²		
Light source Average Life		60,000 hours	80,000 hours	100,000 hours		
Power Consumption*4		270 w	210 w	150 w		
Heat dissipation		921 BTU/h	717 BTU/h	511 BTU/h		
Input Voltage		AC 90-240 V @ 50/60 hz				
Noise level		33.1dB				
Power Supply		Single Power supply				
Dimension (W x H x D) & Weight		Dimension : 1328 x 1007 x 490 mm, Net Weight : Rear = 97Kg, Front = 105Kg				
Operating Temperature		5°C ~ 40°C (41°F ~ 104°F), Operating Altitude : <=4000m				
Non-Operating Temperature		-20°C ~ 60°C (-4°F ~ 140°F)				
Operating / Storage Humidity		10% ~ 90%, non-condensing				

Note: *1. Bright mode Engine brightness, *2. Through electrical compensation, *3 Red color Ratio in white pattern, *4 Change from 2021/1.
 ※ All specifications are subject to change without prior notice. Ver:09.2021