



Energy Storage Solution

Power Conditioning System / PCS100HV

- 100 kW power conversion capacity with 400 Vac
- Scalable system configuration and integration with mainstream battery systems
- Support both grid-tied and power backup operation



Commercial
Building



Charging
Station



Campus



Factory




The Leading Power for Energy Storage

Delta Power Conditioning System (PCS) is a bi-directional energy storage inverter for grid-tied and off-grid applications including power backup, peak shaving, load shifting, PV self-consumption, PV smoothing and more. It demonstrates industry leading power performance with high power efficiency

and low stand-by power loss. It is compact for space saving and offers scalability for various system configurations and integration with multiple battery types and models.



System Architecture

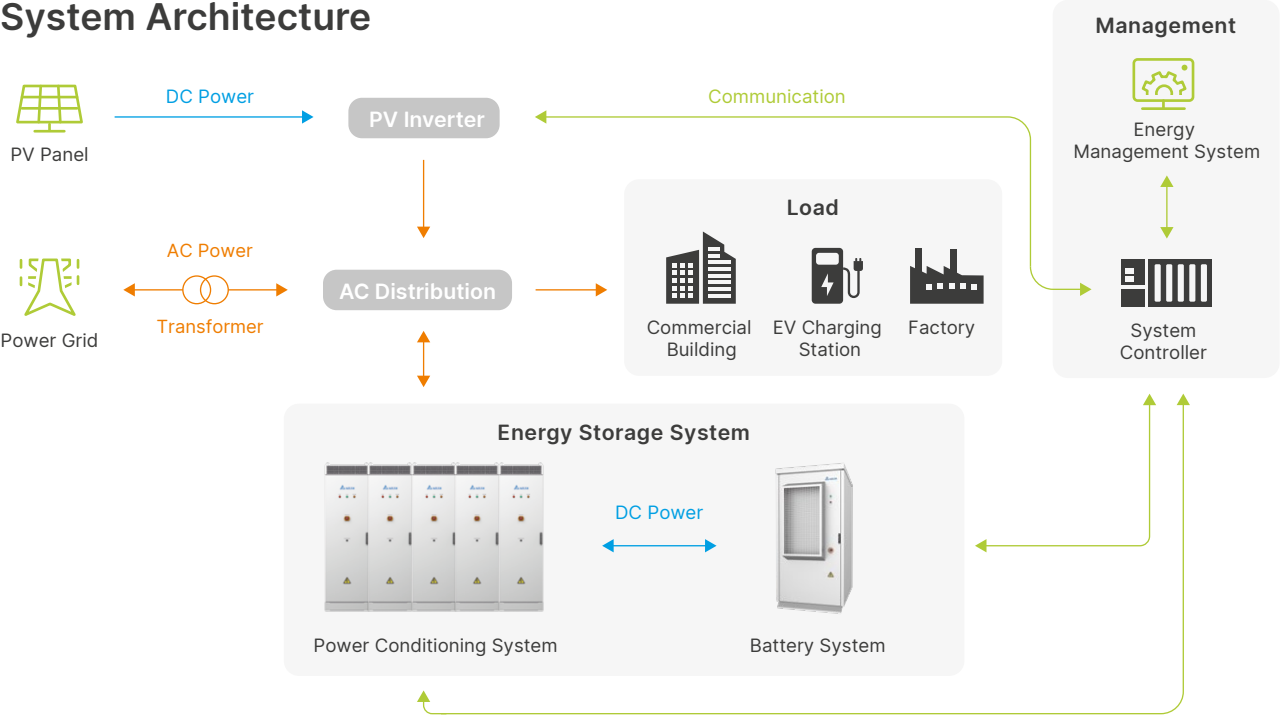


Features




Efficient and Precise Power Control

- Power capacity: 100 kW
- AC voltage: 400 Vac
- Peak efficiency: > 98%
- High power density: 167 W/l, 435 W/kg
- Quick power response time : < 20 ms



Flexible System Configuration

- Scalable configuration with multiple units
- Support for 3-phase, 4-wire load without transformer

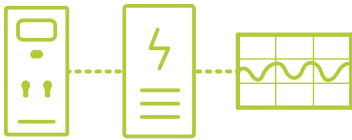

Designed for Energy Storage Applications

- Real/reactive power compensation to improve power quality
- Peak shaving/demand charge management
- Load shifting for time-of-use savings
- Black start capability for power backup and microgrid applications
- Both grid-tied mode and power backup mode operation



Product at a Glance



Specifications

Model Name	PCS100HV
AC Connection	
Rated Grid Voltage	400 Vac (3P-N-PE or 3P-PE)
Grid Voltage Range	310 to 450 Vac
Rated Grid Frequency	50 Hz
Rated AC Active Power	100 kVA / kW
Rated AC Current	145 A
Max. Continuous AC Current	167 A
Maximum AC Apparent Power	110 kVA / kW
Current THD	< 3%
DC Current Injection	< 0.5% of rated current
Power Factor	-1 to 1, continuously adjustable
DC Connection	
DC Voltage Range	650 to 1,350 Vdc for 3P3W ¹⁾ / 700 to 1,350 Vdc for 3P4W in Off-grid mode
DC Voltage Range (Full load)	650 to 1,250 Vdc
Rated Discharge / Charge Power	102 kW / 98 kW
Max. Discharge / Charge Current	157 A / 151 A
Standalone Operation	
Rated Output Voltage	400 Vac (3P-N-PE or 3P-PE)
Rated Output Power	100 kVA / kW with linear load; 80 kVA / kW with non-linear loads (I _{pk} ≤ 240 A) ¹⁾
Rated Output Current	145 A
Overload Capability	110% for 30 mins
Output Voltage THD	< 3% @ rated linear load
Performance	
Peak Efficiency	> 98%
Standby Loss	< 25 W @ in cold mode
Environment	
Maximum Altitude	4,000 m, de-rating > 2,000 m
Operating Temperature	-30 °C to +60 °C, de-rating > 45 °C
Humidity	0 to 95% RH, non-condensing
Acoustic Noise	Maximum < 70 dBA @ 1 m
Cooling	Forced air with speed control
Enclosure Rating	IP55
General	
User Interface	LED, EPO, Ethernet
Communication	Ethernet/Modbus TCP
Dimensions (W x H x D)	600 × 2000 × 500 mm
Net Weight	230 kg
Certifications	Safety: IEC 62477-1, EN 62477-1 Grid: AS/NZS 4777.2:2020, EN 50549-1:2019, G99, VDE-AR-N 4105:2018, VDE-AR-N 4110:2018, MEA, PEA EMC: IEC/EN 61000-6-2, IEC/EN 61000-6-4 Vibration: IEC 60068-2-6:2007
Protection	DC reverse protection/OVP/UVP/OCP/DC insulation detection
Product Conformity	CE, RCM, UKCA

1) Transformer, motor or rectifier loads with large inrush currents (I_{pk} > 240 A) are not supported

2) The enclosure is classified under the C5-Medium corrosivity category according to ISO 12944-2 standards. Ensure proper installation by following the guidelines of the installation manual for optimal performance.

Delta Electronics (Netherlands) BV EMEA Headquarters

Zandsteen 15, 2132 MZ Hoofddorp, The Netherlands
TEL : +31 (0)20 800 3900

Delta Electronics (UK) Ltd.

Hemel Hempstead, Hertfordshire HP2 7EY
TEL : +44 (0)1442 219355

Delta Electronics (Thailand) Public Co., Ltd.

909 Soi 9, Moo 4, Bangpoo Industrial Estate (E.P.Z), Pattana 1 Rd.,
Tambon Phraksa, Amphur Muang, Samutprakarn 10280, Thailand
TEL : +662 709 2800

Delta Electronics (Australia) Pty Ltd.

Unit 18/39 Herbert Street, St Leonards NSW 2065, Australia
TEL : +61-2-9479-4200



2024/01

www.deltaww.com | PCS@deltaww.com

All information and specifications are subjected to change without prior notice.