


CPC 1500B EnergE

DC to DC converter, converting between the voltage level of battery systems to the voltage requirement of equipment. The converter family provides options for converting -48V to +24V and +24V to -48V. The modular format enables easy integration into the standard shelf solutions of existing DC power systems.




CPC 1500B EnergE


Efficiency Curve

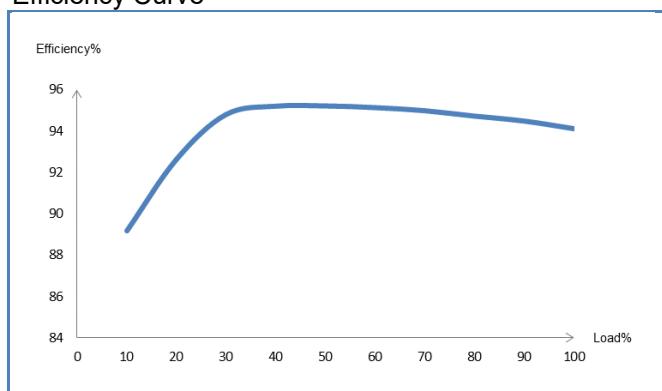


Output Characteristic

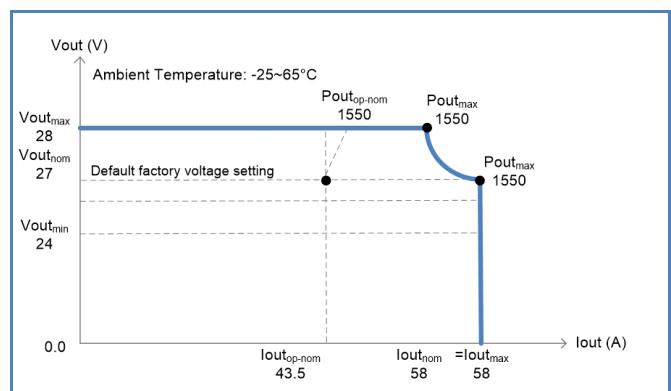

Input Characteristic

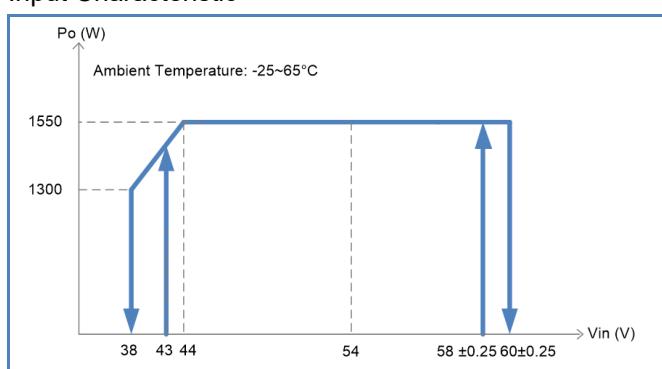

Temperature Characteristic

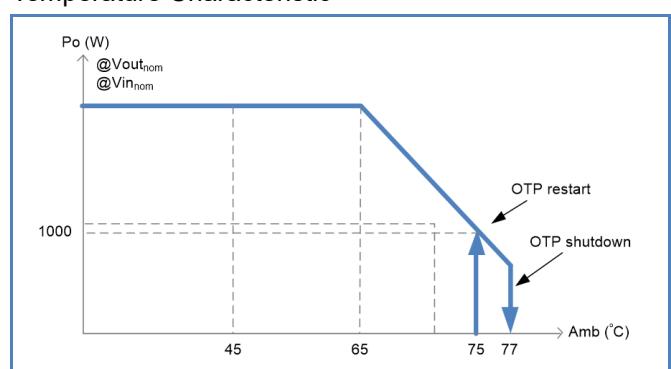

CPC 1500B EnergE



GOAOEO-01-ZL

INPUT

Voltage (nominal)	54V _{DC}
Voltage (range)	38 - 60V _{DC}
Lightening Protection	EN 61000-4-5
Maximum Input Current	38 A
EMI (conducted)	EN 55022, class A FCC 15, class A

OUTPUT

Voltage (default)	27V _{DC}
Voltage (range)	24 - 28V _{DC}
Maximum Output Current	58A
Maximum Power @ nominal Input	1550W
Power Density	18.03W/in ³
Peak Efficiency	95.0%
Load Regulation	< ± 125mV
Ripple	≤ 100mV
Current Sharing	≤ 5% of I _{out,op-nom} @ 50 ~ 100% load condition
Dynamic Load Step Response	Overshoot ≤ ± 0.8V, Settling time <10ms
Lightening Protection	EN 61000-4-5
EMI (conducted)	EN 55022, class A FCC 15, class A

USER INTERFACE

Alarm and Signaling	CANbus to System Controller		
	OK	Green/Red	Normal Operation/Rectifier Shut Down
Indications	COM	Green	Communication Status
	LD	Yellow	Load Status
	STA	Red	OVP; OTP; Fan Failure

MECHANICAL

Dimensions (W x H x D)	84.5 x 40.0 x 403.3mm (3.32 x 1.57 x 15.87in)
Weight	1.8kg (3.96lb)

ENVIRONMENTAL

Operating Temperature	-40 to +75 °C (-40 to +167 °F); De-rating above 65°C (+149 °F)
Storage Temperature	-25 to +55 °C (-13 to +131 °F)
Altitude	-80 to +4000m
Related Humidity	5 – 95 % RH non-condensing
Acoustic Noise	≤ 52dBA
Cooling	Fan cooled

STANDARDS

Safety	Passes CE, UL cUL certifications; Complies with IEC/EN/UL60950-1
EMC	EN 55022 Class A EN 300 386
Environment	RoHS
MTBF	300k hours @ 25 °C (+77 °F)

ORDERING INFORMATION

DCS-27/58A A-S	1500W DC/DC Converter
----------------	-----------------------

* All specifications are subject to change without prior notice.

** Loadsharing = (IN-I_{AVG})/IRATE*100, [%], (IN = The each channel current, [A]; I_{AVG} = The average current of each RRHx (IRRHx / 2), [A]; IRATE = The rating current of each modules, [A])

Delta Electronics Inc.

3 Tungyuan Road, Chungli Industrial Zone,
Taoyuan City 32063, Taiwan.
T +886 3 452 6107 / F +886 3 452 7314
www.deltaww.com

